

FRED MINI-VAC II

COMPACT FUME EXTRACTOR



* Selected Models



The FRED Mini-Vac II is the industry's most powerful, reliable, and convenient to use portable fume extractor - now with high/low modes for maximum performance. The dual motor design allows the welder to switch on just one motor for typical light duty work, and switch on a second motor for more demanding applications.

The ability to switch between high and low modes empowers the operator choose between a higher capture range and less time spent re-positioning with two motors running and a quieter running, lower capture range with one motor running.

Welding in the field or confined spaces requires a portable fume extractor that people will actually use.

Benefits:

- Protect your breathing zone by filtering harmful weld fumes with high efficiency nanofiber technology
- Meet and exceed North American safety standards, including OSHA, for weld fume capture-at-source

Features:

- Designed for light-medium duty welding
- Lightweight, exceptionally portable design
- Nanofiber MERV 15 Filter Cartridge
- Magnetic nozzle base for secure nozzle placement
- Filter service indicator

Options:

- HEPA primary filter - 99.97% @ 0.3 micron
- Spunbond Polyester Filter Cartridge (washable)



Standard Filter

NANOTECH XV

MERV 15 efficient cartridge filter captures particles at the submicron level, and surface-loading technology allows dust to be easily dislodged during cleaning with compressed air.



10002973

EFFICIENCY:	MERV 15
FILTER MEDIA:	NANOFIBER
MEDIA AREA:	55 SQ.FT.
COATING:	FIRE RETARDANT
END CAP:	OPEN/CLOSED
CLEANING METHOD:	COMPRESSED AIR
MAX TEMP:	180° F / 82° C
FLANGE:	NONE

Optional Filters

POLYTECH XI

High strength, high efficiency (MERV 11) cartridge filter made from 100% spun-bond polyester that lowers costs, by allowing for water-based cleaning of captured contaminants.



10002914

EFFICIENCY:	MERV 11
FILTER MEDIA:	SPUNBOND POLY
MEDIA AREA:	44 SQ.FT.
COATING:	FIRE RETARDANT
END CAP:	OPEN/CLOSED
CLEANING METHOD:	AIR + WATER WASH
MAX TEMP:	180° F / 82° C
FLANGE:	NONE


HEPA

The HEPA cartridge filter captures particles at the submicron level, it provides the highest level of filtration efficiency 99.97% at 0.3 micron.



10002926

EFFICIENCY:	99.97% AT 0.3 MICRON
FILTER MEDIA:	HEPA
MEDIA AREA:	40 SQ.FT.
COATING:	NONE
END CAP:	OPEN/CLOSED
CLEANING METHOD:	DISPOSABLE
MAX TEMP:	180° F / 82° C
FLANGE:	NONE

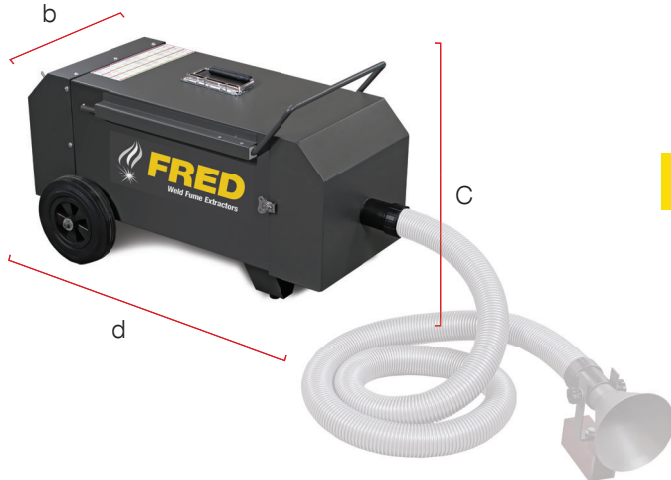

IMPORTANT : If your equipment was purchased after November 15, 2018, a Replacement Filter Card, featuring filter details and simple instructions to easily order replacement filters, will be located on the filter door.

Dimensions **

Model	Filter Type	Cord Length (ft.)	Hose Length (ft.)	Product Dimensions (in.)		
				Width [b]	Height [C]	Length [d]
FRED Mini-Vac II compact welding fume extractor						
MINI-VAC2	Nano-Fiber	6	10	16.5	18.5	35.5
	HEPA	6	10	16.5	18.5	35.5
	Poly	6	10	16.5	18.5	35.5

** Product dimensions are based on base-models and may vary depending on selected product features. Please contact us for an accurate shipping quote.

Technical Specifications

Model	Motor (H.P.)	Airflow (CFM)	Input Power				Noise @5ft (dB)
			Phase	(volts)	(hz)	(amps)	
FRED Mini-Vac II compact welding fume extractor							
MINI-VAC2	1.0HP x 2	105/210	1	120	60	16.0	68/77

HEAD OFFICE

3200 rue Guénette
Saint-Laurent, QC, Canada
H4S 2G5



DIVERSITECH

Part of Absolent
Air Care Group

1-800-361-3733

info@diversitech.ca
www.diversitech-air.com
www.diversitech.ca